


CBB62 Metallized Polypropylene Film Capacitors

- Features: Very small loss, excellent frequency and temperature characteristics, high insulation resistance, Reliable quality due to self healing effect. As an across the line type noise suppression capacitor, and suitable for AC purpose. Withstanding 2.5kV impulse voltage, Class X2 . Flame retardant epoxy resin coating (UL94/V-0)

Technical Specifications

Items	Characteristics
Standard	GB/T 14472-98 (IEC 384-14)
Climatic	40/085/21
Rated voltage	250/275VAC, 400VAC
Capacitance Range	0.010 uF-1.0uF
Capacitance Tolerance	±5%(J) ; ± 10% (K); ± 20% (M)
Voltage Proof	4.3UR VDC (5s)
Insulation Resistance	≥150000M Ω, CR ≤ 0.33uF (20°C, 1min, 100V) ≥5000s, CR > 0.33uF
Dissipation Factor	≤ 0.001 (20°C, 1KHz)

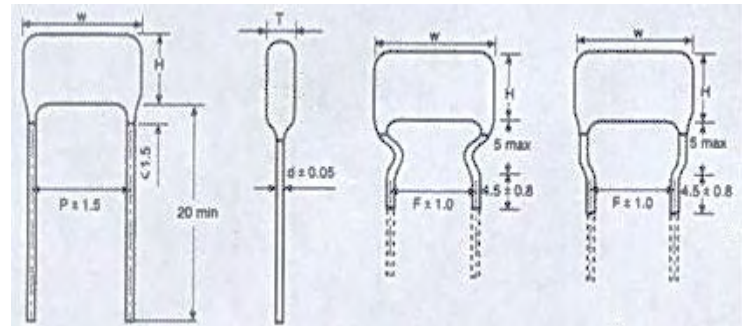

Dimension

CR (uR)	250/275 VAC					400VAC				
	W	H	T	P	d	W	H	T	P	d
0.010	14.0	12.0	7.0	10.0	0.6	14.0	12.0	7.0	10.0	0.6
0.012	14.0	12.5	8.0	10.0	0.6	14.0	12.5	7.5	10.0	0.6
0.015	14.0	13.0	8.0	10.0	0.6	14.0	13.0	8.0	10.0	0.6
0.018	14.0	13.5	8.5	10.0	0.6	14.0	14.0	8.5	10.0	0.6
0.022	14.0	14.0	9.0	10.0	0.6	14.0	15.0	9.0	10.0	0.6
0.027	14.0	15.0	10.0	10.0	0.6	19.0	13.0	7.0	15.0	0.6
0.033	14.0	15.5	10.5	10.0	0.6	19.0	13.5	8.0	15.0	0.6
0.039	17.5	15.0	9.0	12.5	0.6	19.0	14.5	8.5	15.0	0.6
0.047	17.5	15.5	10.0	12.5	0.6	19.0	15.0	9.0	15.0	0.6
0.056	17.5	16.0	10.5	12.5	0.6	19.0	17.0	9.5	15.0	0.8
0.068	17.5	16.5	11.0	12.5	0.6	25.0	16.0	8.5	20.0	0.8
0.082	17.5	17.5	12.0	12.5	0.6	25.0	16.5	9.0	20.0	0.8
0.10	25.0	15.5	10.0	20.0	0.8	25.0	17.5	10.0	20.0	0.8
0.12	25.0	16.0	10.5	20.0	0.8	25.0	18.5	11.0	20.0	0.8
0.15	25.0	17.0	11.5	20.0	0.8	25.0	19.5	12.0	20.0	0.8
0.18	25.0	18.0	12.0	20.0	0.8	25.0	20.5	13.0	20.0	0.8
0.22	25.0	20.0	12.5	20.0	0.8	30.0	21.0	12.0	25.0	0.8
0.27	25.0	21.0	13.5	20.0	0.8	30.0	22.5	13.0	25.0	0.8
0.33	25.0	22.0	15.0	20.0	0.8	30.0	23.5	14.5	25.0	0.8
0.39	30.0	22.0	13.5	25.0	0.8	36.0	23.0	14.0	30.0	0.8
0.47	30.0	22.0	16.0	25.0	0.8	36.0	24.5	15.5	30.0	0.8
0.56	30.0	25.0	15.5	25.0	0.8					
0.68	36.0	24.5	15.5	30.0	0.8					
0.82	36.0	26.0	17.0	30.0	0.8					
1.0	36.0	28.0	18.5	30.0	0.8					