


CL11X Polyester Film Capacitors

- Structure: Polyester film used as dielectric, inductive construction, epoxy resin dip sealed.
- Features: Excellent insulation and heat proof, small size, low dissipation good reliability of capacitance.
- Uses: Extensively apply to DC and pulse circuits of broadcasting and TV sets, all kinds of instruments and communication equipments and energy-saving lamps and electronic lighting ballast.
- According to user's need, capacitors of no standard and special specification ca produced.

Technical Specifications

Items	Characteristics
Standard	GB 6349-1986 (SJ/T 10786-1996)
Climatic	55/085/21
Rated voltage	63V, 160V, 250V, 400V 630V, 1000V, 1200V
Capacitance Range	0.001 uF-0.47uF
Capacitance Tolerance	±5%(J) ; ± 10% (K); ±20% (M)
Voltage Proof	2.0UR
Insulation Resistance	≥ 30000M Ω
Dissipation Factor	≤ 0.01 (1KHz) ≤ 0.015 (10KHz)

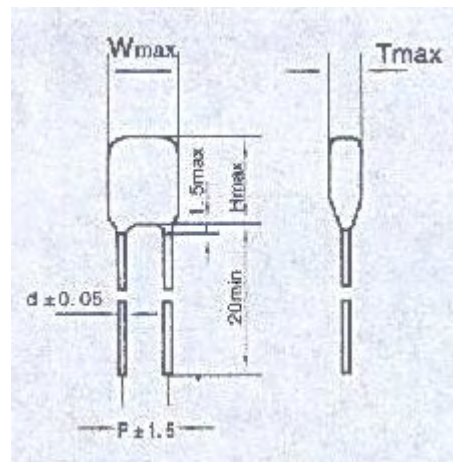

Miniature Dimension

C _R (uF)	63/160V			
	W	H	T	P
0.001-0.0056	5.5	7.5	3.0	3.0
0.0068-0.01	6.0	7.5	3.0	3.0
0.012-0.018	6.5	9.5	3.5	4.0
0.022	6.5	9.5	4.0	4.0
0.027-0.033	7.0	9.5	4.0	5.0
0.039-0.047	8.0	9.5	4.0	5.0
0.056-0.068	9.0	11.0	5.0	5.0-6.0
0.082	9.0	11.5	5.5	5.0-7.0
0.1-0.12	10.0	11.5	6.0	5.0-7.0
0.15	11.0	12.5	6.0	5.0-7.0
0.18	12.0	13.0	7.0	6.0-8.0
0.22	13.0	13.0	7.0	6.0-8.0
0.27	13.0	14.0	8.0	6.0-8.0
0.33	13.0	14.5	8.0	8.0-10.0
0.39	14.0	15.0	10.0	8.0-10.0
0.47	15.0	15.0	11.0	8.0-10.0