


**CL21X Metallized Polyester Film Capacitors**

- Features: Excellent small size, light weight capacitance range, self healing property, long life and excellent performance.

**Technical Specifications**

Items	Characteristics
Standard	GB 7332 (IEC 384-2)
Climatic	55/085/21
Rated voltage	50/63V- 100V,
Capacitance Range	0.0010 uF-1.0uF
Capacitance Tolerance	±5%(J) ; ± 10% (K);
Voltage Proof	1.6UR (5s)
Insulation Resistance	≥18000M Ω, CR ≤0.33Uf (20°C, 100V, 1min) ≥6000s, CR> 0.33 uf
Dissipation Factor	≤ 0.008 (20°C,1KHz)

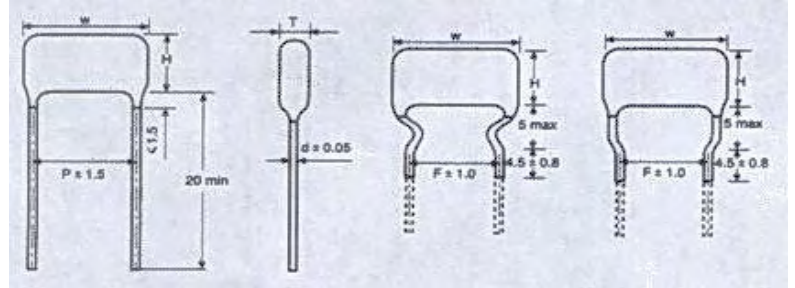

**Dimension**

CR (uF)	50/63V					100V				
	W	H	T	P	d	W	H	T	P	d
0.0010	7.3	7.5	4.5	5.0	0.5	7.3	7.5	4.5	5.0	0.5
0.0012	7.3	7.5	4.5	5.0	0.5	7.3	7.5	4.5	5.0	0.5
0.0015	7.3	7.5	4.5	5.0	0.5	7.3	7.5	4.5	5.0	0.5
0.0018	7.3	7.5	4.5	5.0	0.5	7.3	7.5	4.5	5.0	0.5
0.0022	7.3	7.5	4.5	5.0	0.5	7.3	7.5	4.5	5.0	0.5
0.0027	7.3	7.5	4.5	5.0	0.5	7.3	7.5	4.5	5.0	0.5
0.0033	7.3	7.5	4.5	5.0	0.5	7.3	7.5	4.5	5.0	0.5
0.0039	7.3	8.0	4.5	5.0	0.5	7.3	7.5	4.5	5.0	0.5
0.0047	7.3	8.0	4.5	5.0	0.5	7.3	8.0	4.5	5.0	0.5
0.0056	7.3	8.0	4.5	5.0	0.5	7.3	8.0	4.5	5.0	0.5
0.0068	7.3	8.0	4.5	5.0	0.5	7.3	8.0	4.5	5.0	0.5
0.0082	7.3	8.0	4.5	5.0	0.5	7.3	8.0	4.5	5.0	0.5
0.010	7.3	7.0	4.0	5.0	0.5	7.3	8.0	4.0	5.0	0.5
0.012	7.3	7.0	4.0	7.5	0.5	7.3	7.0	4.0	5.0	0.5
0.015	7.3	7.5	4.0	7.5	0.5	7.3	7.0	4.0	5.0	0.5
0.018	7.3	7.5	4.0	7.5	0.5	7.3	7.5	4.0	5.0	0.5
0.022	7.3	7.0	4.0	7.5	0.5	7.3	7.0	4.0	5.0	0.5
0.027	7.3	7.0	4.0	7.5	0.5	7.3	7.0	4.0	5.0	0.5
0.033	7.3	7.5	4.5	7.5	0.5	7.3	7.5	4.5	5.0	0.5
0.039	7.3	7.5	4.5	7.5	0.5	7.3	7.5	4.5	5.0	0.5
0.047	7.3	7.5	4.5	7.5	0.5	7.3	7.5	4.5	5.0	0.5
0.056	7.3	8.0	4.5	7.5	0.5	7.3	8.0	4.5	5.0	0.5
0.068	7.3	8.0	4.5	7.5	0.5	7.3	8.0	4.5	5.0	0.5
0.082	7.3	8.0	4.5	7.5	0.5	7.3	8.0	4.5	5.0	0.5
0.10	7.3	9.5	4.5	7.5	0.5	7.3	9.5	4.0	5.0	0.6
0.12	10.2	8.0	4.5	7.5	0.5	10.2	8.0	4.5	7.5	0.6
0.15	10.2	9.0	4.5	7.5	0.5	10.2	9.0	4.5	7.5	0.6
0.18	10.2	9.0	4.5	7.5	0.5	10.2	9.0	4.5	7.5	0.6

0.22	10.2	9.5	5.0	7.5	0.5	10.2	9.5	5.0	7.5	0.6
0.27	10.2	10.0	5.5	7.5	0.5	10.2	10.0	5.5	7.5	0.6
0.33	10.2	8.0	5.0	7.5	0.5	10.2	11.0	6.0	7.5	0.6
0.39	10.2	8.5	5.0	7.5	0.5	10.2	11.5	6.5	7.5	0.6
0.47	10.2	9.0	5.5	7.5	0.5	10.2	12.0	7.0	7.5	0.6
0.56	10.2	9.0	6.0	7.5	0.5	10.2	12.5	7.5	7.5	0.6
0.68	10.2	9.5	6.5	7.5	0.5	10.2	12.5	8.5	7.5	0.6
0.82	10.2	10.0	7.0	7.5	0.5	10.2	13.5	9.5	7.5	0.6
1.0	10.2	11.0	7.5	7.5	0.5	10.2	14.5	10.5	7.5	0.6